
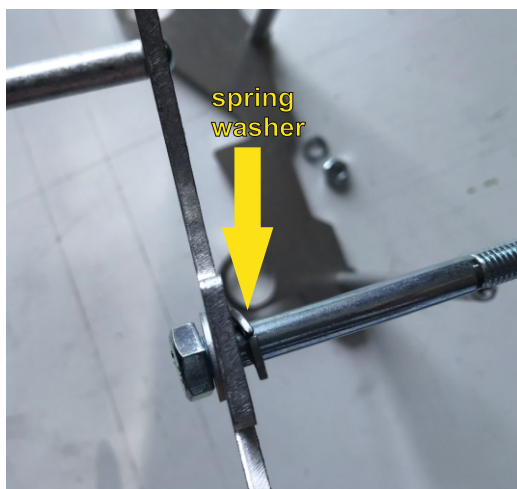


RG09/RG09 F - radiator guards for KTM and HUSQVARNA MY 2020 4T and 2T TPI - INSTALLATION MANUAL

Drain the cooling liquid, disassemble the seat, side plastics, radiators and the plastic cable organizer on the right side of the frame.


rod spacers

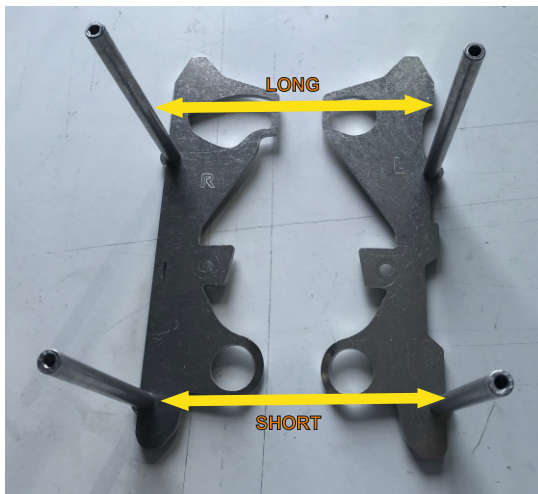



RG09 / RG09 F - INSTALLATION MANUAL




TURN ONLY THE NUT AND POSITION THE BRACKETS BEFORE TIGHTENING (FIG. A, B, C, D, E)

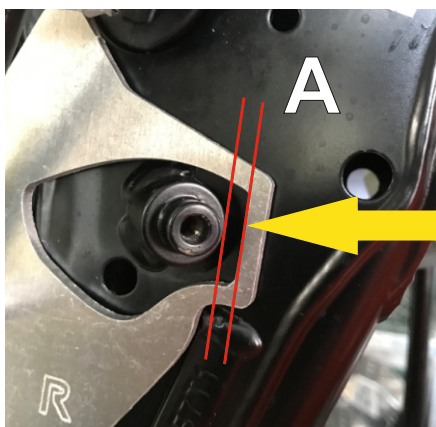

SPACE BETWEEN THE GUARD AND THE RADIATOR MOUNTING ON FRAME FOR PLASTIC FITTING OF THE RADIATOR

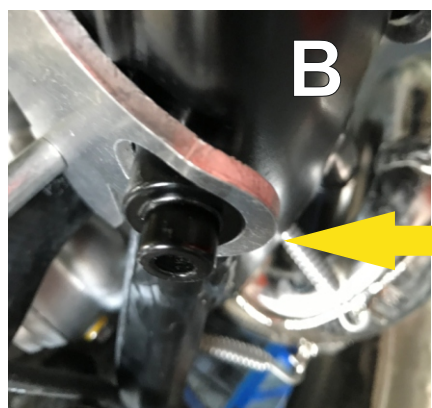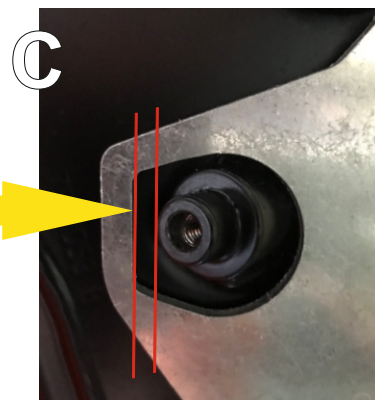


THE GUARD HAS TO HANDLE TO THE RADIATOR MOUNTING ON FRAME.

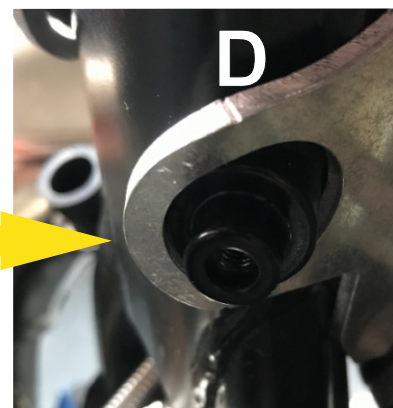


AFTER SETTING THE BRACKETS, TIGHTEN THE NUT. THE SCREW IS TO BE ALIGN WITH A NUT.

RG09 / RG09 F - INSTALLATION MANUAL

INSTALL A PLASTIC CABLE ORGANIZER.

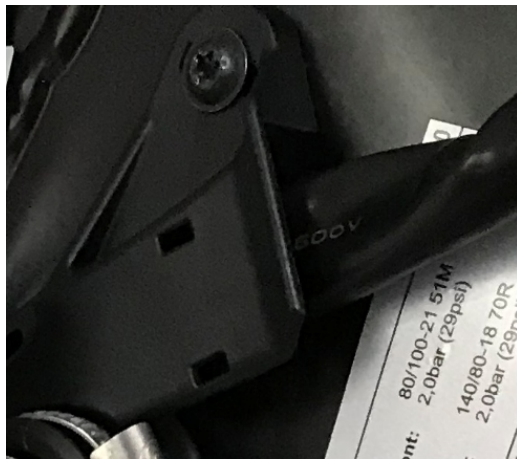

INSTALL RADIATORS

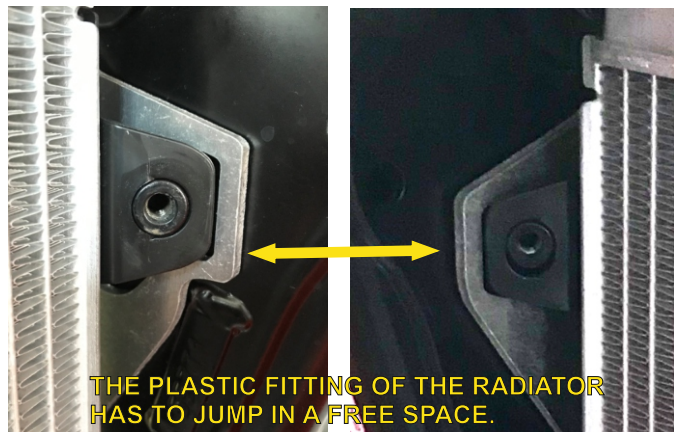


THE PLASTIC FITTING OF THE RADIATOR HAS TO JUMP IN A FREE SPACE.



RG09 / RG09 F - INSTALLATION MANUAL

SCREW THE FRONTS

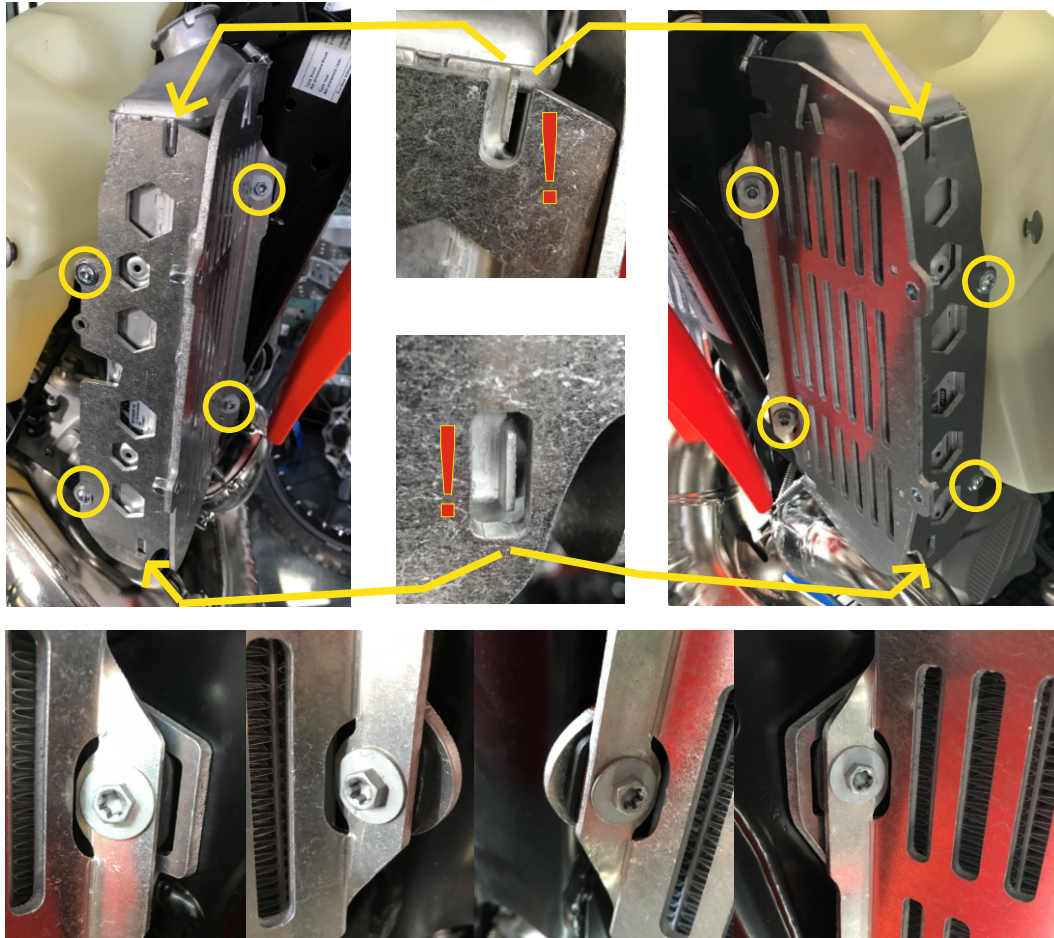

GRAB FRONT SCREWS




TIGHTEN THE SIDE PLASTIC AND SCREW REMAINING SCREWS ON THE TANK.



ARTAFON.COM

RG09 / RG09 F - INSTALLATION MANUAL

TIGHTEN PLASTICS, SET UP SEAT, FILL THE RADIATORS WITH LIQUID.

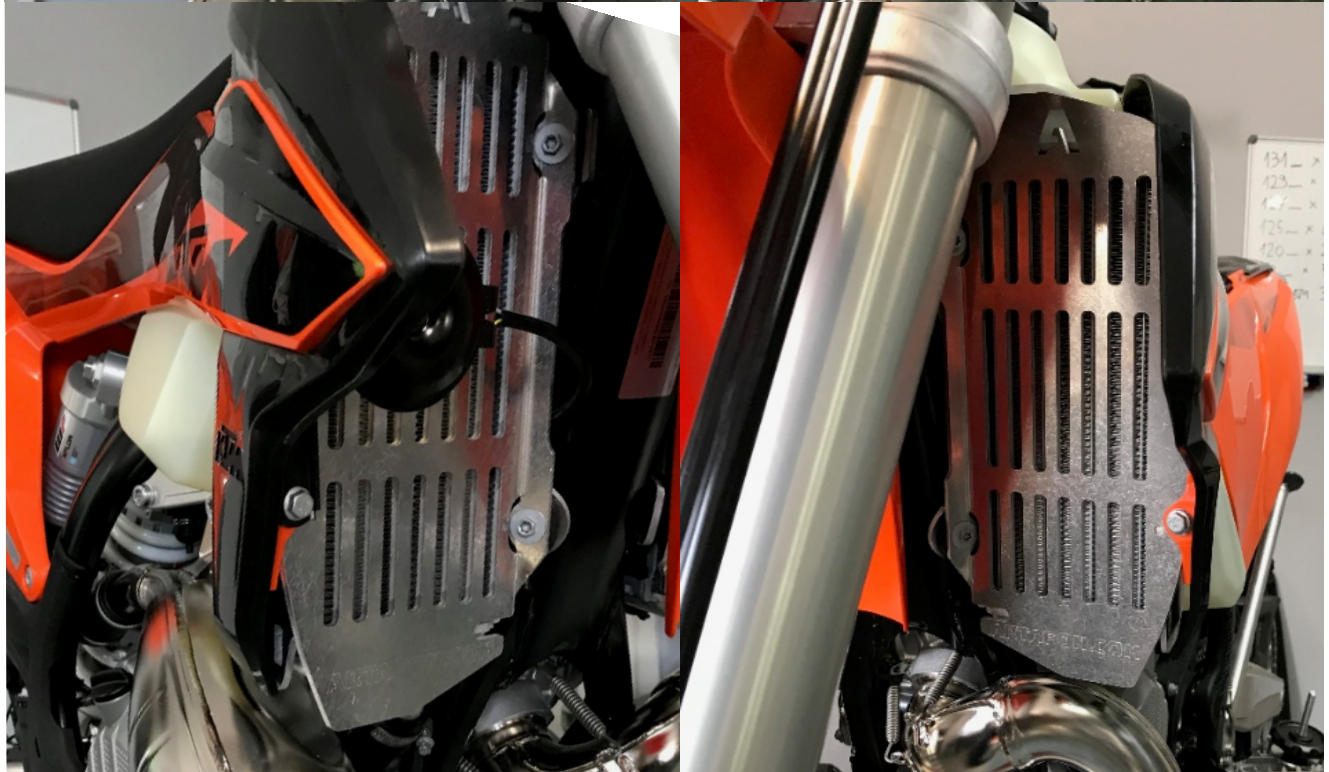

READY!